


# Symphony In-Table Boxes



# FSR

## Metal Products Group

SYM In-Table Boxes

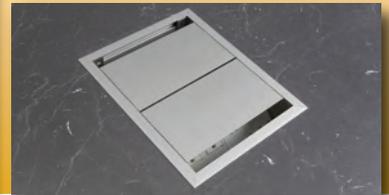

## DESCRIPTION

Symphony Table Boxes bring elegant form to technology. The Symphony In-Table or Dual In-Table models provide an attractive user interface. Solid construction throughout ensures reliable performance in demanding environments.

A wide variety of models allow convenient access to network CATx cables, mobile device charging, AV cables and AC power.

The standard models can be ordered with up to four AC outlets, two USB charging ports, and two low voltage openings that receive FSR Simple Solutions and Hubbell™ keystone style snap in connectors. (See ordering table).

Custom builds are available containing up to five AC power receptacles, two dual USB chargers and any low voltage connector configuration. Now available FSR's Symphony combination USB charging port incorporates power management integrated circuitry to communicate via today's and legacy protocols to determine the charging requirements for your devices. The built in overload protected, auto-recovery power supply, provides the fastest charging based on the available power to one or both ports.

The "DIN" models are dual door boxes that allow users access to the connector ports on either side of the table.

The access doors on the units can be closed when not in use leaving a sleek uncluttered work surface.

Both "Clamp-On" or "Under-Table" styles are offered for table, shelf or chair mounting as well as custom configurations. See LIT1723 SYM Series for details.

## FEATURES

- Elegant Design
- Compact Size
- Toolless Drop-In Installation
- Top-Side Installation of Data and A/V Inserts
- Designed for 2 to 5 AC Outlets
- Up to 2-Dual USB Chargers with full 5V 10W charging capability on each charging port
- Up to 2-Dual combination charging ports (USB Type-C and USB Type-A)
- Sized for Cat-6 and Larger Cables
- Sized to fit HDMI, VGA Bulkheads and Cables

## APPLICATIONS

- Desks
- Boardroom Tables
- Lecterns
- Control Consoles
- Lab Tables
- Classrooms
- Work Tables
- Huddle Areas
- Multipurpose Rooms

1CC Combination USB charging port now available.



## FSR Inc.

244 Bergen Boulevard, Woodland Park, NJ 07424  
Phone: 973.998.2300 · Fax: 973.785.4207  
Web: [www.fsrinc.com](http://www.fsrinc.com) · E-mail: [sales@fsrinc.com](mailto:sales@fsrinc.com)  
Order Desk: 1-800-332-FSR1



LIT1724D

# SYM-IN & DIN ORDERING INFORMATION

## Single Side Table Box, SYM-IN



### Table Box Frame A

Overall 6.3" x 5.43"  
Cutout 6-1/16" x 5" ±1/16"





### Table Box Frame B

Overall 7.73" x 5.43"  
Cutout 7-7/16" x 5" ±1/16"






### Table Box Frame C

Overall 8.69" x 5.43"  
Cutout 8-7/16" x 5" ±1/16"





### Table Box Frame D

Overall 10.12" x 5.43"  
Cutout 9-7/8" x 5" ±1/16"

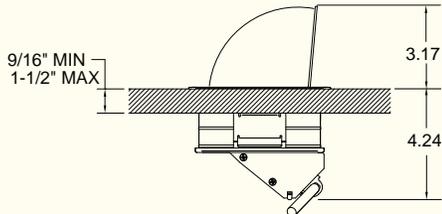



## Dual Sided Table Box, SYM-DIN



Overall 6.3" x 9.76"  
Cutout 6-1/16" x 9-5/16" ±1/16"






Overall 7.73" x 9.76"  
Cutout 7-7/16" x 9-5/16" ±1/16"



Overall 8.69" x 9.76"  
Cutout 8-7/16" x 9-5/16" ±1/16"



Overall 10.12" x 9.76"  
Cutout 9-7/8" x 9-5/16" ±1/16"

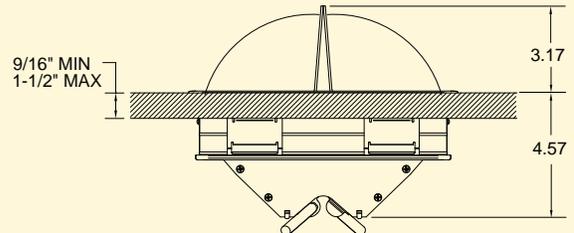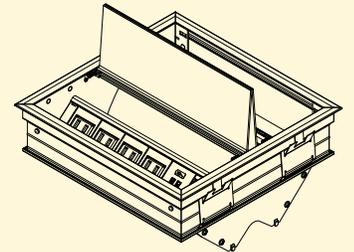

### Power Cord Options:

Add Suffix to Model Number

6' Black Cord, **Blank** or **-6B**  
6' White Cord, **-6W**


9'6" Black Cord, **-9B**  
9'6" White Cord, **-9W**

# SYM-IN & DIN ORDERING INFORMATION


\*Add 1CC in place of 1CA for Dual combination charger insert (USB Type-C and USB Type-A)

## Table Box Frame A Standard Model Numbers

SYM-(IN or DIN)-2AC-1SS-AW




SYM-(IN or DIN)-2AC-1CA-AW




## Table Box Frame B Standard Model Numbers

SYM-(IN or DIN)-2AC-1CA-1SS-AW

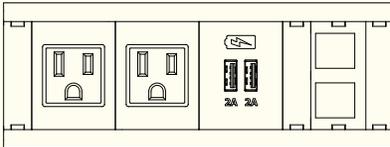


SYM-(IN or DIN)-3AC-1CA-AW

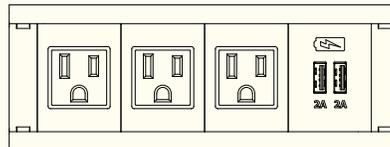


## Table Box Frame C Standard Model Numbers


SYM-(IN or DIN)-2AC-1CA-2SS-AW

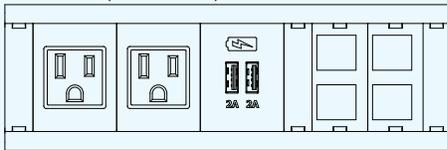


SYM-(IN or DIN)-2AC-2CA-1SS-AW

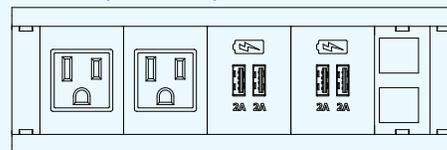

SYM-(IN or DIN)-3AC-1CA-1SS-AW

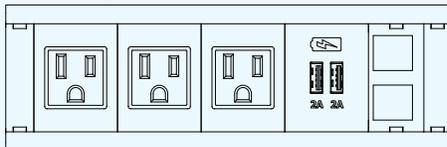


SYM-(IN or DIN)-2AC-1CA-1VGA-1SS-AW

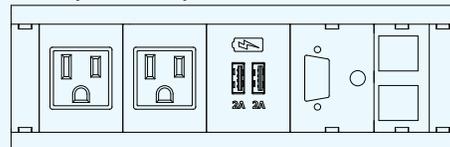


## Table Box Frame D Standard Model Numbers


SYM-(IN or DIN)-4AC-1CA-1SS-AW

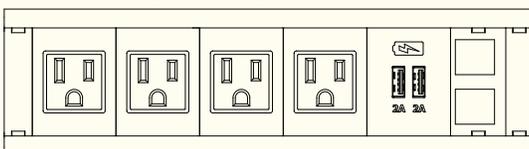


SYM-(IN or DIN)-3AC-1CA-2SS-AW

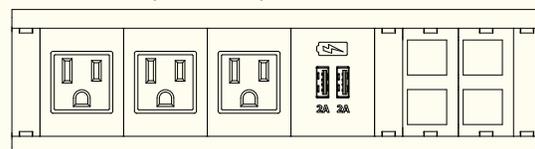


SYM-(IN or DIN)-3AC-2CA-1SS-AW

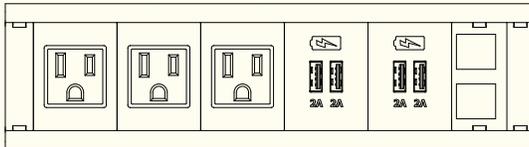


SYM-(IN or DIN)-4AC-1CA-AW

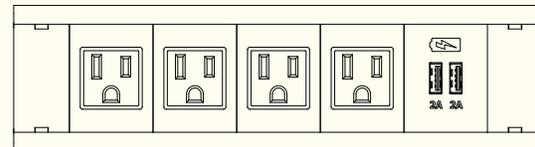

SYM-(IN or DIN)-3AC-1CA-1VGA-1SS-AW

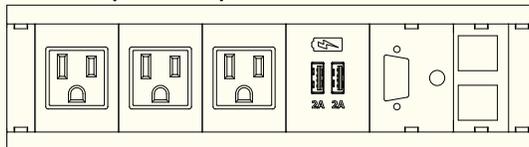

SYM-(IN or DIN)-3AC-2CA-AW

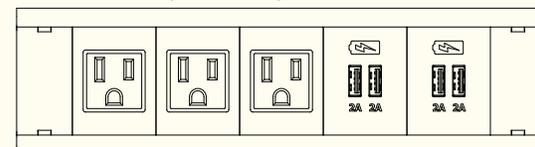

Denotes a Kit of 3 Provided Inserts, a Blank, Single and Dual Keystone



See Back Page for Keystone Connectors and VGA Interface Components

## CONNECTORS/INSERTS

Item	Description
18130	SS-CAT5e-W SYM PUNCH DOWN CAT-5e 1000BASE-T KEYSTONE
18132	SS-CAT6-W SYM PUNCH DOWN CAT-6 10GbE KEYSTONE
18129	SS-HDMI-W SYM & TBL BOX WHITE PASS-THRU KEYSTONE
17624	SS-SCAT6A CAT6A SHIELDED SNAP-N KEYSTONE
17205	SS-USBA-B PASS THRU SNAP-IN KEYSTONE
25991	SS-RJ45-B PASS THRU SNAP-IN BLACK CAT 5E KEYSTONE
16820	SS-RJCAT6-B PASS THRU SNAP-IN BLACK RJ-45 CAT 6 CONNECTOR KEYSTONE
18347	SS-USB-C-CHRG <i>Universal Charging Port, Snap-In module style, compatible with USB-C® devices, with Power Supply</i>
18348	SS-USB-C-CHRG-NPS <i>Universal Charging Port, Snap-In module style, compatible without USB-C® devices, No Power Supply</i>
26968	6' FEMALE HD-15 CHASSIS MOUNT to MALE CABLE for VGA INSERT
36131	1/8" or 3.5MM HEADPHONE JACK to 3-PIN SCREW TERMINAL for VGA INSERT
31008	REPLACEMENT HUBBELL .5U BLANK WHITE INSERT
31009	REPLACEMENT HUBBELL 1U BLANK WHITE INSERT
31010	REPLACEMENT HUBBELL 1U 1 KEYSTONE WHITE INSERT
31011	REPLACEMENT HUBBELL 1U 2 KEYSTONE WHITE INSERT
31012	REPLACEMENT HUBBELL 1.5U XLR OPENING WHITE INSERT
31015	REPLACEMENT HUBBELL 1.5U VGA & 1.5MM JACK WHITE INSERT

### In-Table



### Clamp-On



### Under-Table



## SPECIFICATIONS

AC power input	125VAC 15A 60Hz
AC power output	15A maximum combined total current on all receptacles 15A maximum total current from each individual receptacle
USB Charging Ports output	1CA- 5V 10W from each port
Approvals	UL 962A, CSA C22.2 No. 308-18
Combination USB Ports Output	1CC-USB-A 2 Amps 10 Watts / USB-C 3 Amps 15 Watts

Specifications are subject to change without notice.



244 Bergen Boulevard, Woodland Park, NJ 07424

Phone: 973.998.2300 · Fax: 973.785.4207

Web: [www.fsrinc.com](http://www.fsrinc.com) · E-mail: [sales@fsrinc.com](mailto:sales@fsrinc.com)